


Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Limestone, Sydney Blend, Brisbane Blend & Endeavour Blend
Product Code	20.127 HS Half Height
Format	20.127 HS Half Height
Place of Manufacture	Gympie, Queensland
Length (mm)	390
Width (mm)	190
Height (mm)	90
Size	390x190x90
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	30.4
Weight	8.3
Units Per Tonne	120.48192771084
Units Per Pallet	180
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Brisbane Blend, Endeavour Blend, Sydney Blend & Limestone
Product Code	10.125 HS Corner Return
Format	10.125 HS Corner Return
Place of Manufacture	Gympie, Queensland
Length (mm)	390
Width (mm)	190
Height (mm)	190
Size	390x190x190
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	20
Units Per Tonne	50
Units Per Pallet	90
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Brisbane Blend, Limestone, Sydney Blend & Endeavour Blend
Product Code	10.93 HS Half
Format	10.93 HS Half
Place of Manufacture	Gympie, Queensland
Length (mm)	190
Width (mm)	90
Height (mm)	190
Size	190x90x190
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	5.4
Units Per Tonne	208.333333333333
Units Per Pallet	300
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Sydney Blend, Endeavour Blend, Limestone & Brisbane Blend
Product Code	20.142 Channel
Format	20.142 Channel
Place of Manufacture	Gympie, Queensland
Length (mm)	390
Width (mm)	190
Height (mm)	190
Size	390x190x190
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	17.25
Units Per Tonne	50
Units Per Pallet	90
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Brisbane Blend, Limestone, Sydney Blend & Endeavour Blend
Product Code	
Format	50.21 1 Face Split Capping Tile
Place of Manufacture	Gympie, Queensland
Length (mm)	390
Width (mm)	190
Height (mm)	65
Size	390x190x65
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	>15
Minimum Shell Thickness (mm)	-
Weight	13.2
Units Per Tonne	75.757575757576
Units Per Pallet	90
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram

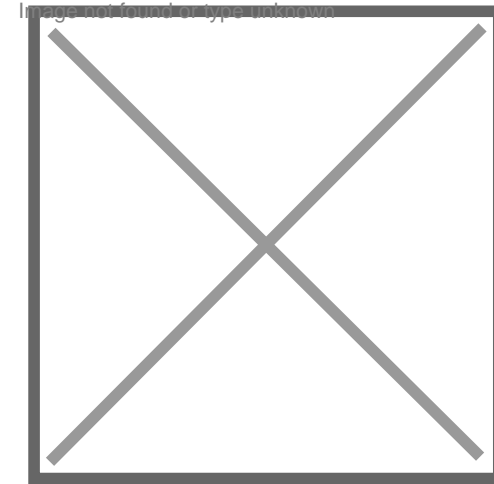

Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-


Notes

-

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Sydney Blend, Endeavour Blend, Limestone & Brisbane Blend
Product Code	10.92 HS Three Quarter
Format	10.92 HS Three Quarter
Place of Manufacture	Gympie, Queensland
Length (mm)	290
Width (mm)	90
Height (mm)	190
Size	290x90x190
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	9.1
Units Per Tonne	109.89010989011
Units Per Pallet	200
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	-
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Limestone, Sydney Blend, Endeavour Blend & Brisbane Blend
Product Code	20.145 Cleanout
Format	20.145 Cleanout
Place of Manufacture	Gympie, Queensland
Length (mm)	390
Width (mm)	190
Height (mm)	190
Size	390x190x190
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	16.7
Units Per Tonne	50
Units Per Pallet	90
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Sydney Blend, Endeavour Blend, Brisbane Blend & Limestone
Product Code	50.65 Split Pier Capping Tile
Format	50.65 Split Pier Capping Tile
Place of Manufacture	Gympie, Queensland
Length (mm)	325
Width (mm)	325
Height (mm)	65
Size	325x325x65
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	13.2
Units Per Tonne	75.757575757576
Units Per Pallet	90
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Brisbane Blend, Limestone, Endeavour Blend & Sydney Blend
Product Code	20.123 Half
Format	20.123 Half
Place of Manufacture	Gympie, Queensland
Length (mm)	190
Width (mm)	190
Height (mm)	190
Size	190x190x190
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	9.5
Units Per Tonne	105.26315789474
Units Per Pallet	180
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Sydney Blend, Limestone, Endeavour Blend & Brisbane Blend
Product Code	10.95 HS Veneer Solid
Format	10.95 HS Veneer Solid
Place of Manufacture	Gympie, Queensland
Length (mm)	390
Width (mm)	90
Height (mm)	190
Size	390x90x190
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	14.5
Units Per Tonne	68.965517241379
Units Per Pallet	200
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Sydney Blend, Brisbane Blend, Limestone & Endeavour Blend
Product Code	20.139 HS Corner
Format	20.139 HS Corner
Place of Manufacture	Gympie, Queensland
Length (mm)	390
Width (mm)	190
Height (mm)	190
Size	390x190x190
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	18.2
Units Per Tonne	50
Units Per Pallet	90
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Brisbane Blend, Endeavour Blend, Sydney Blend & Limestone
Product Code	20.133 HS Knockout
Format	20.133 HS Knockout
Place of Manufacture	Gympie, Queensland
Length (mm)	390
Width (mm)	190
Height (mm)	190
Size	390x190x190
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	16.7
Units Per Tonne	54.945054945055
Units Per Pallet	90
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
Product Code	20.121 Standard
Format	20.121 Standard
Place of Manufacture	Gympie, Queensland
Length (mm)	390
Width (mm)	190
Height (mm)	190
Size	390x190x190
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	30.4
Weight	17.3
Units Per Tonne	59.880239520958
Units Per Pallet	90
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60

Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Brisbane Blend, Limestone, Endeavour Blend & Sydney Blend
Product Code	50.70 Split Step Tread
Format	50.70 Split Step Tread
Place of Manufacture	Gympie, Queensland
Length (mm)	390
Width (mm)	350
Height (mm)	65
Size	390x350x65
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	16.9
Units Per Tonne	59.171597633136
Units Per Pallet	90
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	60 to 240 (see notes)
Integrity	60
Insulation	60


Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is: 18.0 at 60 minutes | 17.0 at 90 minutes | 16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes. This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999. ^When reinforced and Srf 36: 240 minutes

Product Details

Product Range	GB Sandstone Rock Face
Texture Finish	Rock Face
Colours	Brisbane Blend & Sydney Blend
Product Code	50.66 4 Sided Capping Tile
Format	50.66 4 Sided Capping Tile
Place of Manufacture	-
Length (mm)	330
Width (mm)	330
Height (mm)	65
Size	330x330x65
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	-
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	Exposure Grade
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	No
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

-